




BEAM KEYBOARD

Controlling your BEAM is easy using the keyboard.

Please make sure that:




Batteries are equipped and that the **yellow saftey ribbon** is pulled out.

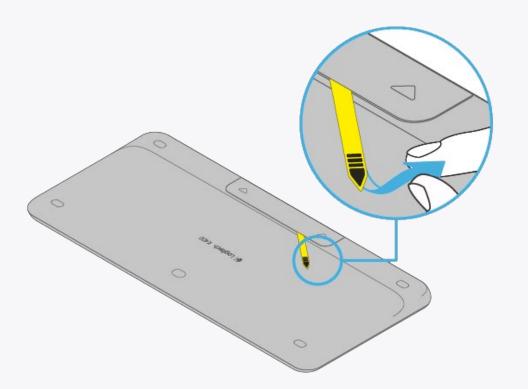



The **toggle** on the side of the keyboard is on and its green background is visible.

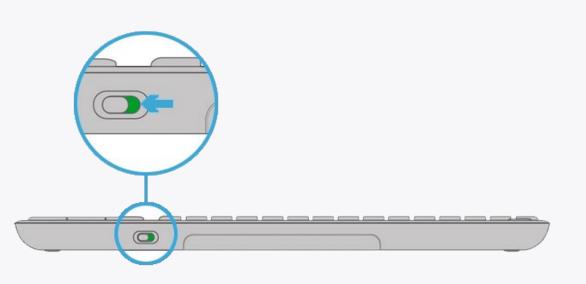




Navigate and control your obie using the **keyboard's trackpad**.



CONTROL AREA

You can always access the control area on your device by pressing **CTRL+Q**.



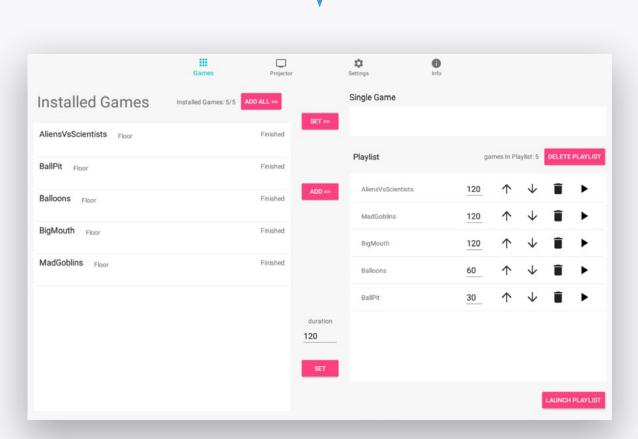

CONTROL AREA

The control area is divided to 4 sections:



GAMES

Control your games and playlist.



SETTINGS

View and control your BEAM's settings.



PROJECTOR


Turn the projection off, manage device schedules and the adjust the projection.



INFO

View the device, components and software information relevant when contacting support.


Navigate between the sections through the top menu bar

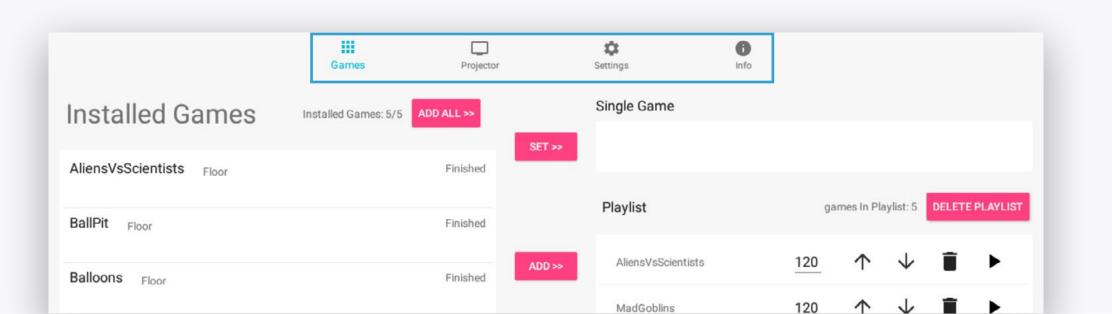

Control your games and playlist.

- INSTALLED GAMES

 A list of all the games installed on your BEAM.
- Click on a game row to select that game. You can select multiple games.

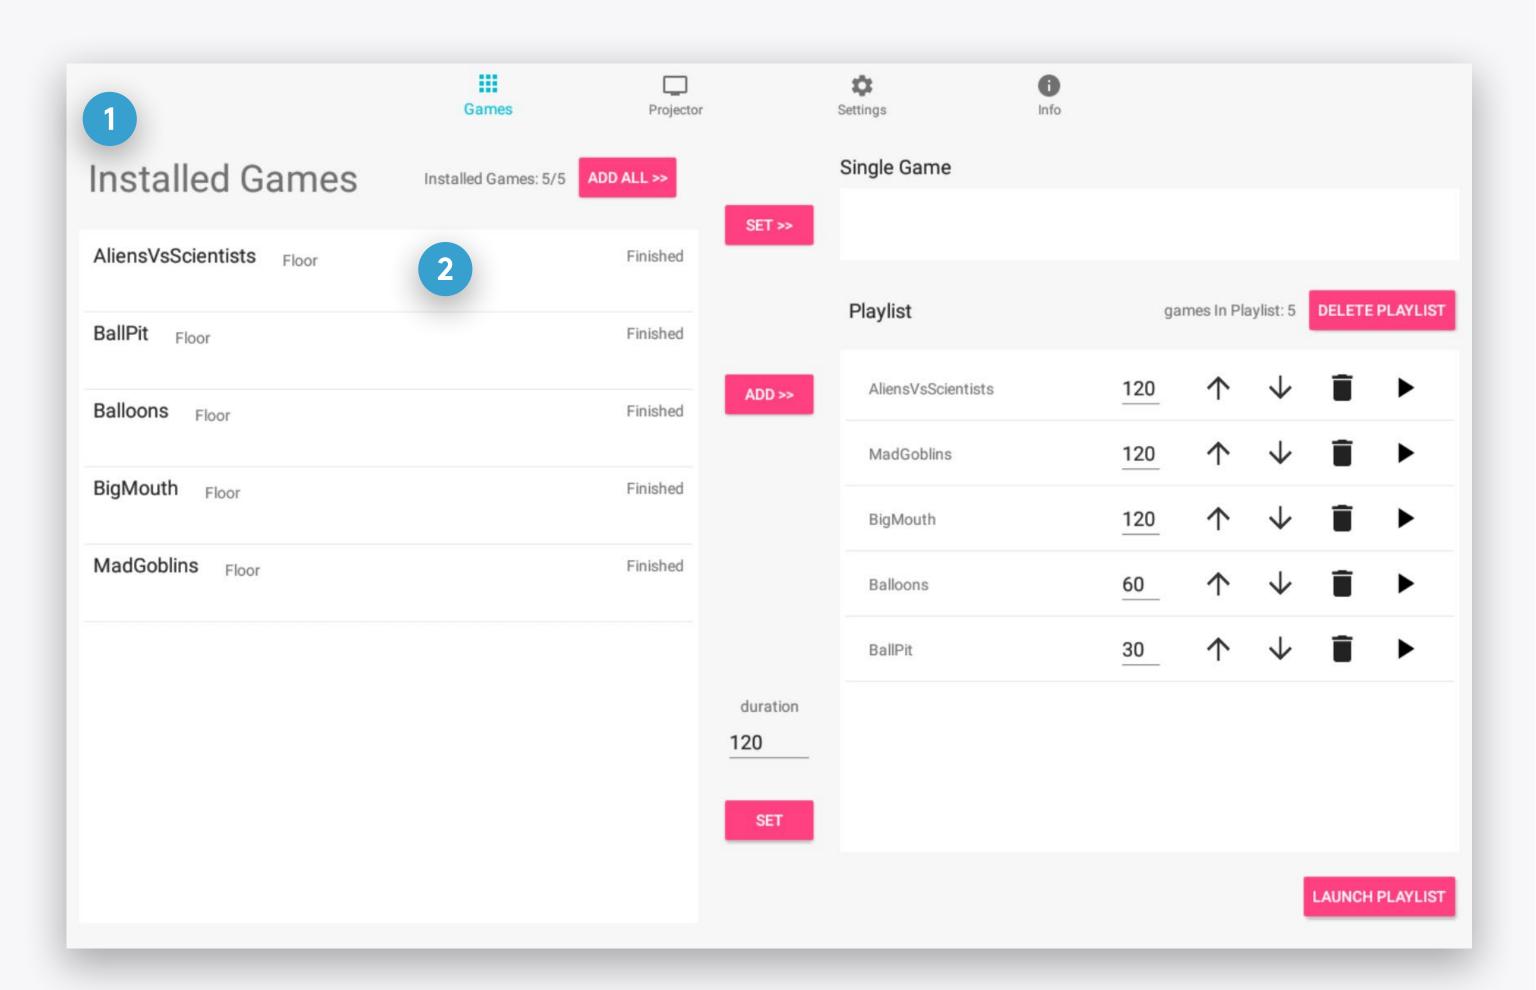

Control your games and playlist.

- ADD SELECTED GAMES


 Once you've selected several games from the Installed Games list, click on the ADD >> button to add them to the Playlist. Click on the ADD ALL >> button to add all the installed games at once.
- PLAYLIST

 This list contains all the games set to be played.
- DELETE PLAYLIST

 Clear all the games in the playlist you can always add them again from the Installed Games list.

Note

You can also click the **ADD ALL** >> **button** to select and add all the installed games to the Playlist.

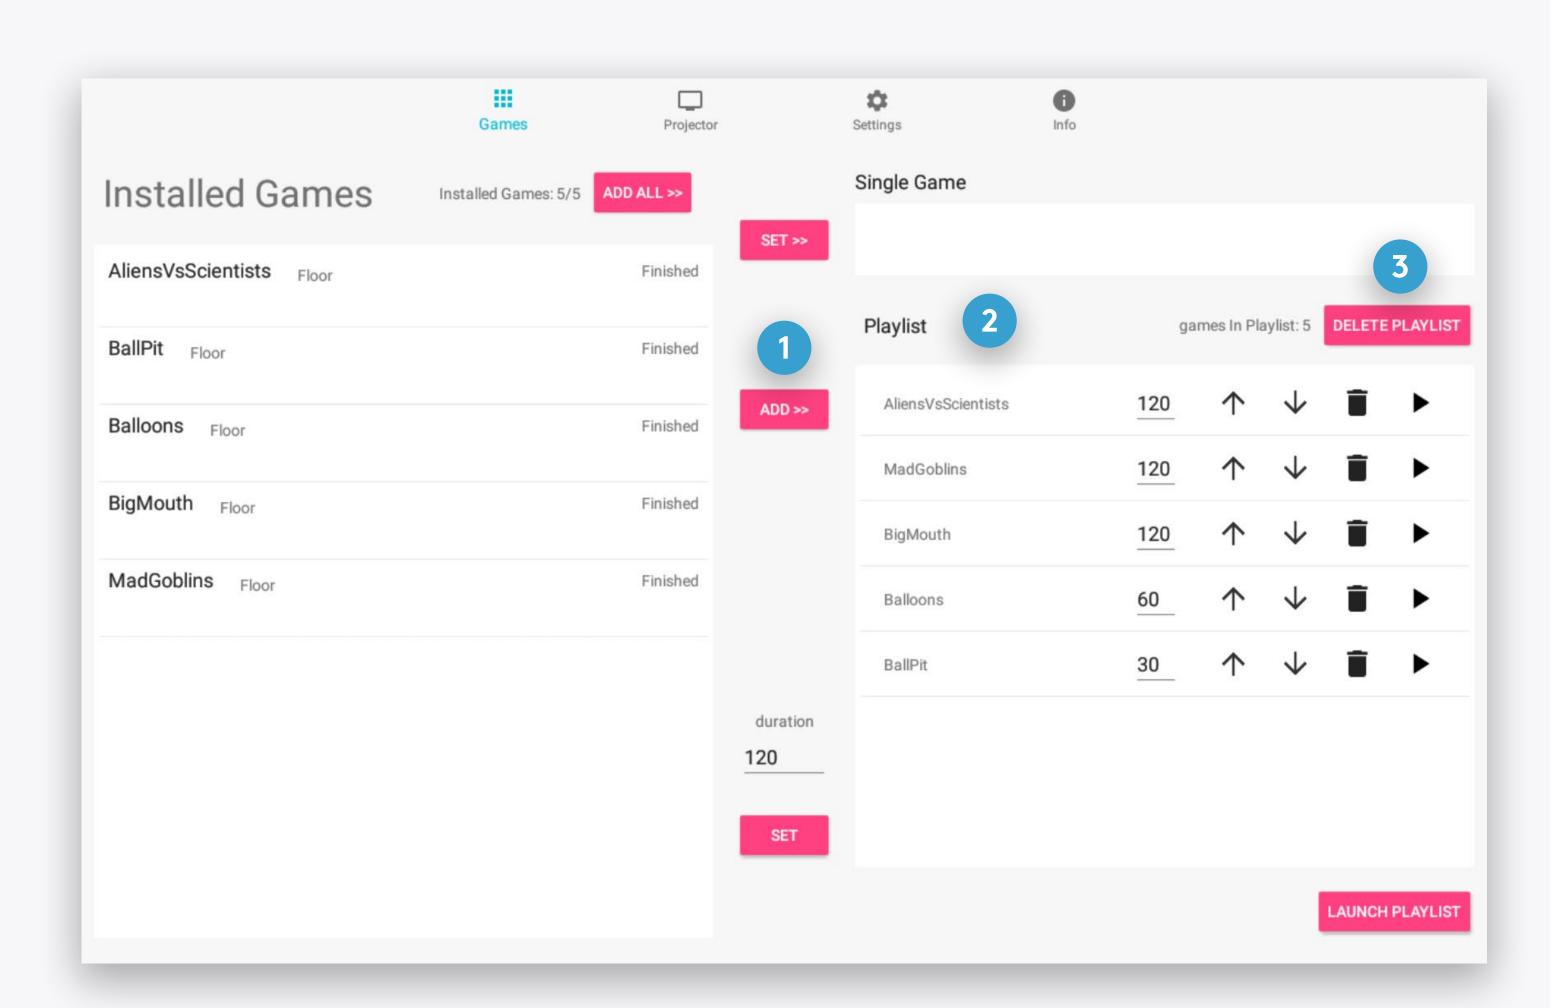

Control your games and playlist.


- SET PLAYLIST GAMES' DURATION

 Edit the seconds field and click the SET button
 to change the duration for all the games
 currently in the Playlist.
- SET A GAME'S DURATION

 Edit the seconds field to change the duration of a specific game in the Playlist.
- ORDER ARROWS


 Click the arrow buttons to change the game order in the Playlist.
- REMOVE GAME

 Click the remove button to remove a specific game from the Playlist.

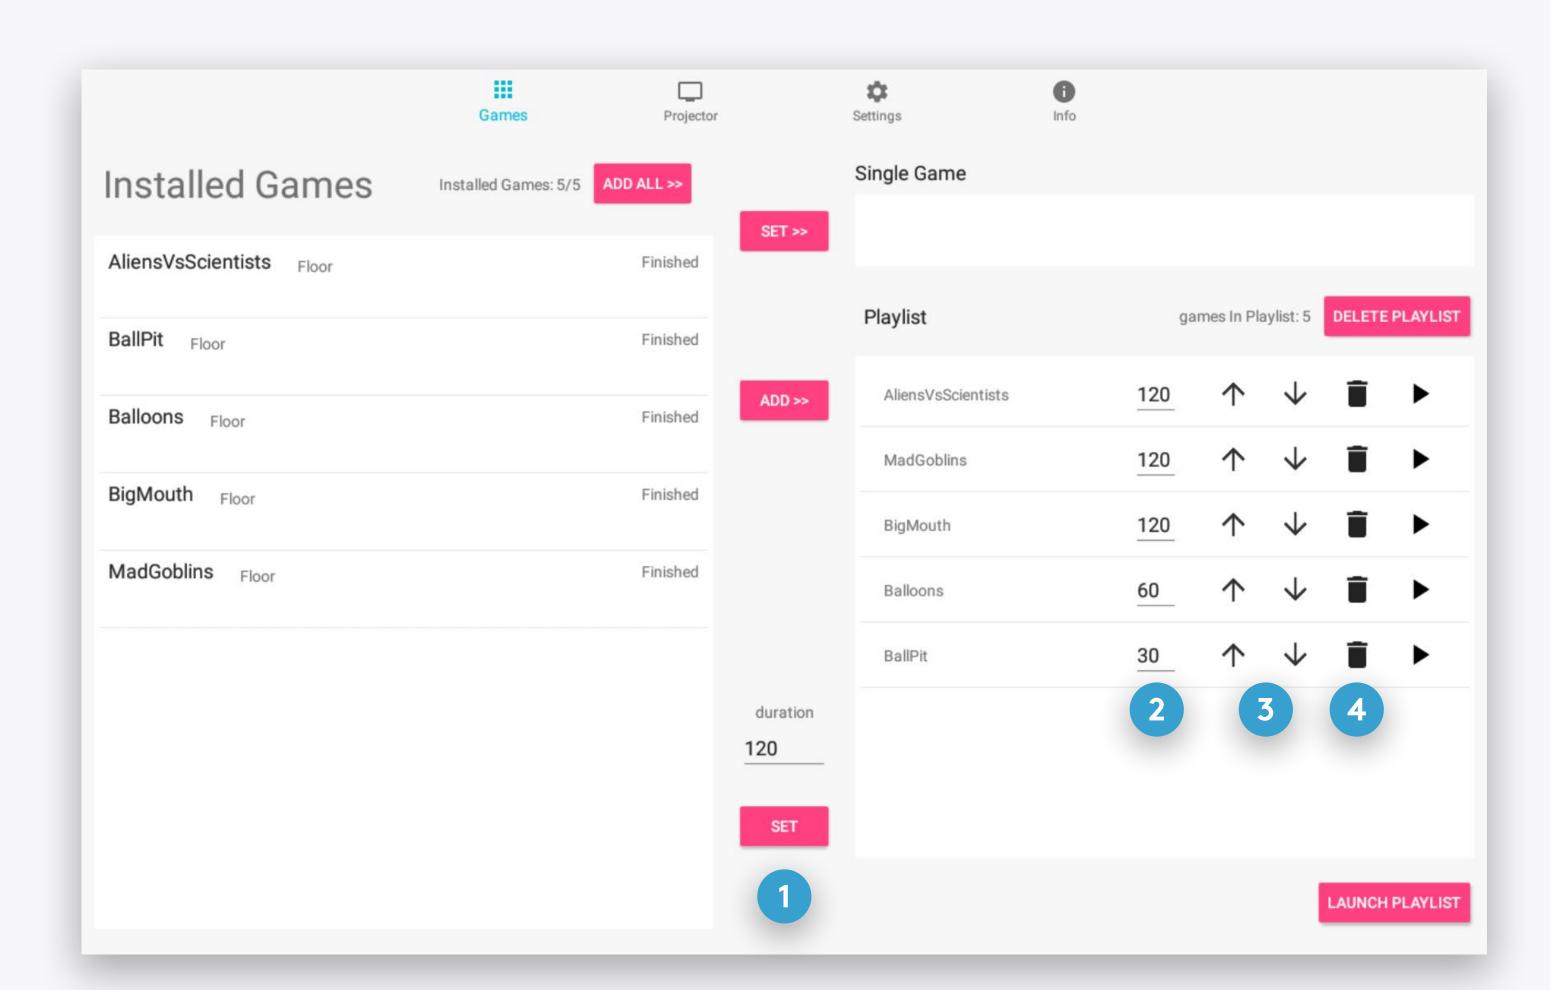

Control your games and playlist.

- LAUNCH PLAYLIST FROM A SPECIFIC GAME
 - Click the **play icon** to start the Playlist from a specific game.
- 2 LAUNCH PLAYLIST
 Start playing the games in the playlist.

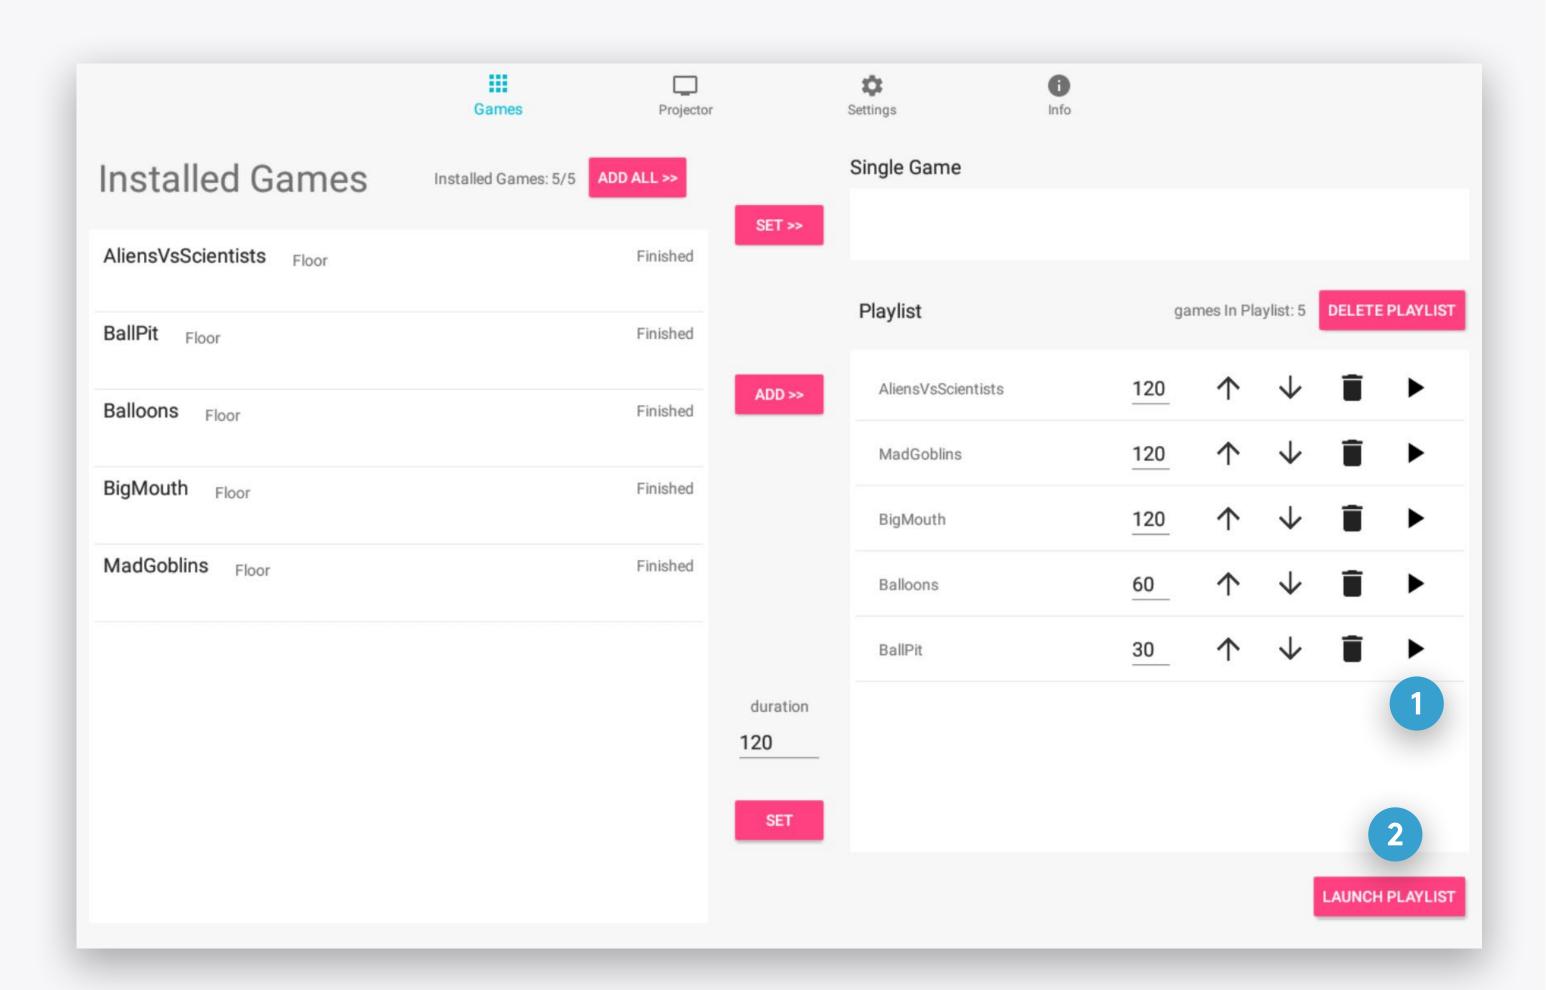

You can also play a single game without creating a Playlist:


- SELECT A SINGLE GAME

 By clicking the specific game row in the Installed

 Games list.
- SET GAME

 Click on the SET >> button to set the selected game. This will remove all the games in the existing playlist.
- 2 LAUNCH PLAYLIST

 Start playing the set game. As it has no set duration, it will continue playing indefinitly until you decide to stop it.

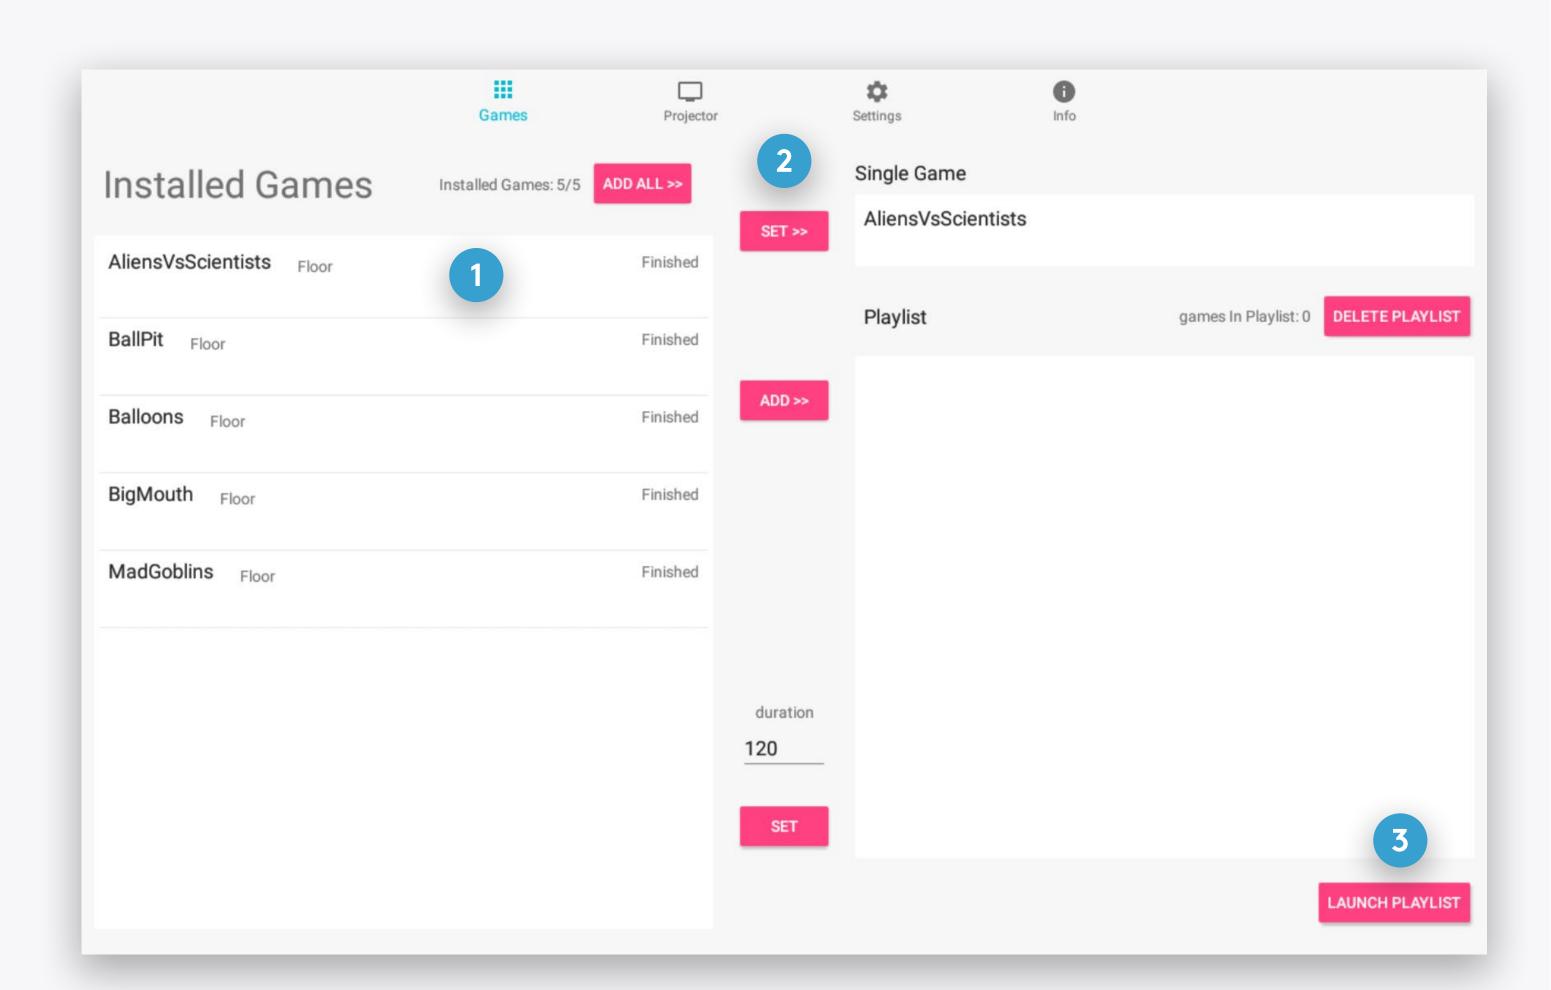


PROJECTOR

Turn the projection off, manage device schedules and the adjust the projection.

- ADD SCHEDULE

 Create a new operating schedule
- 2 EDIT SCHEDULE
 Change the times and days of a schedule
- Disable/enable a schedule

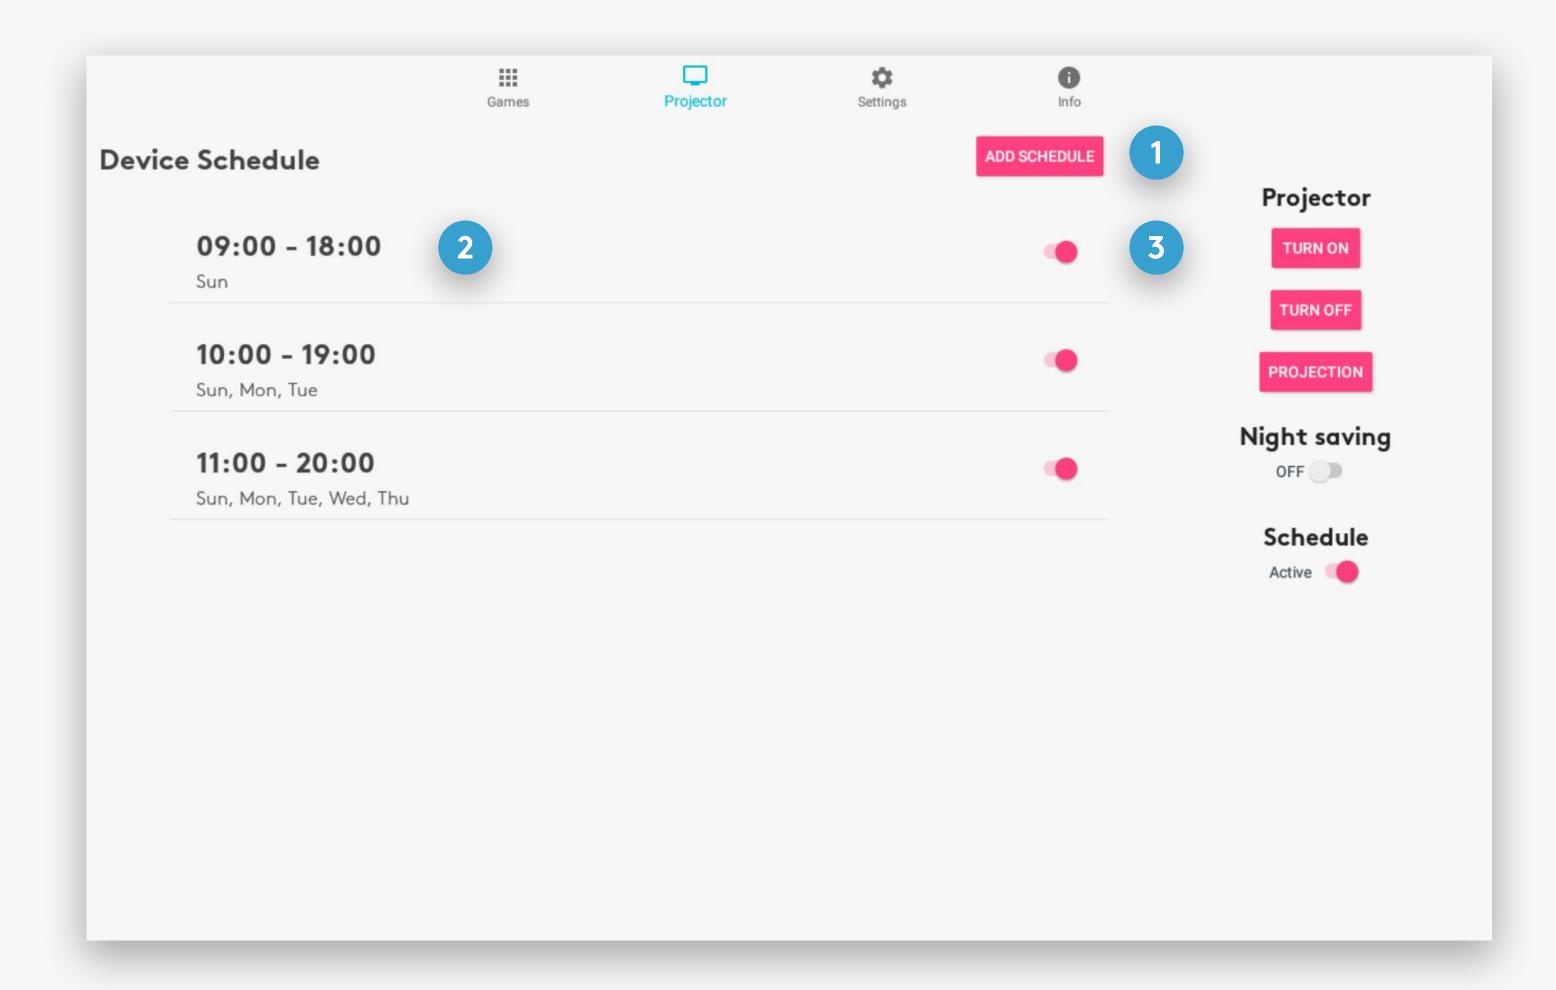


PROJECTOR

Turn the projection off, manage device schedules and the adjust the projection.

- TURN PROJECTOR OFF

 And enter the device to Sleep Mode.
- PROJECTION

 Rotate or flip the projection
- DISABLE/ENABLE NIGHT SAVING
 When Night Saving is enabled, your device will shut down every night between 1 to 7 AM. Night Saving supersede all schedules.
- This setting controls all schedules. If disabled, no schedule will operate, even if it's status is enabled.

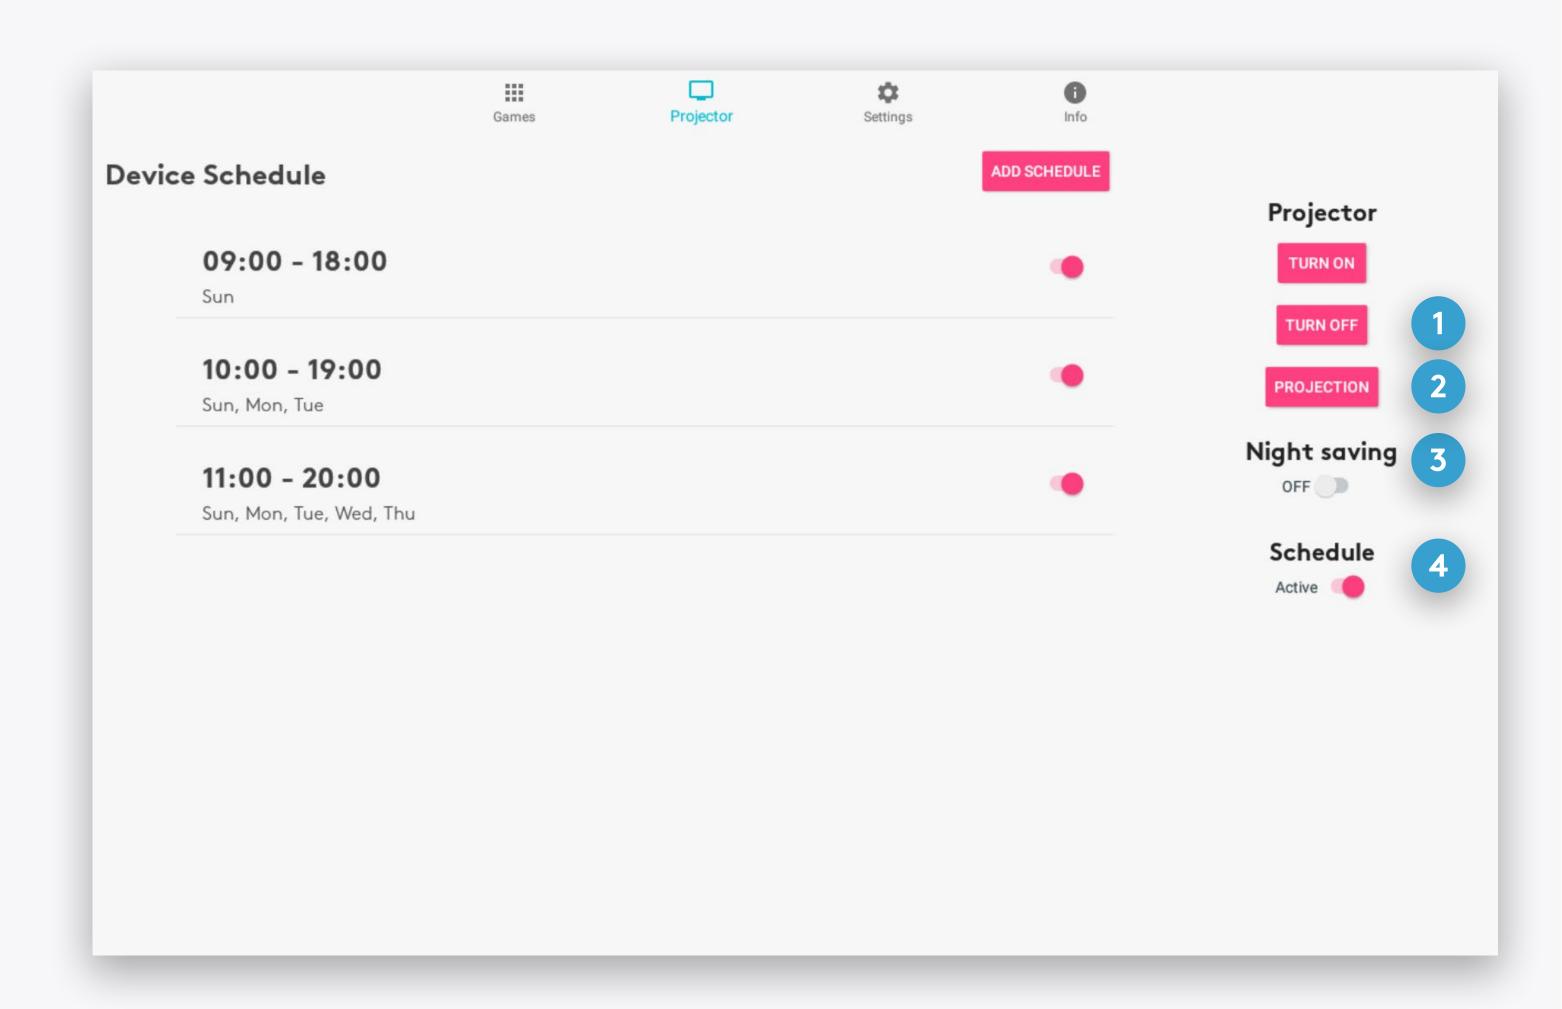


SCHEDULE

Edit a schedule by clicking on its row in the Projector screen. Change the times and days of a schedule by selecting to edit them.

- START/END TIMES
 Select a time to change it
- ACTIVE WEEK DAYS

 Select the days for this schedule
- SAVE
 Save your changes
- DELETE

 Delete this schedule

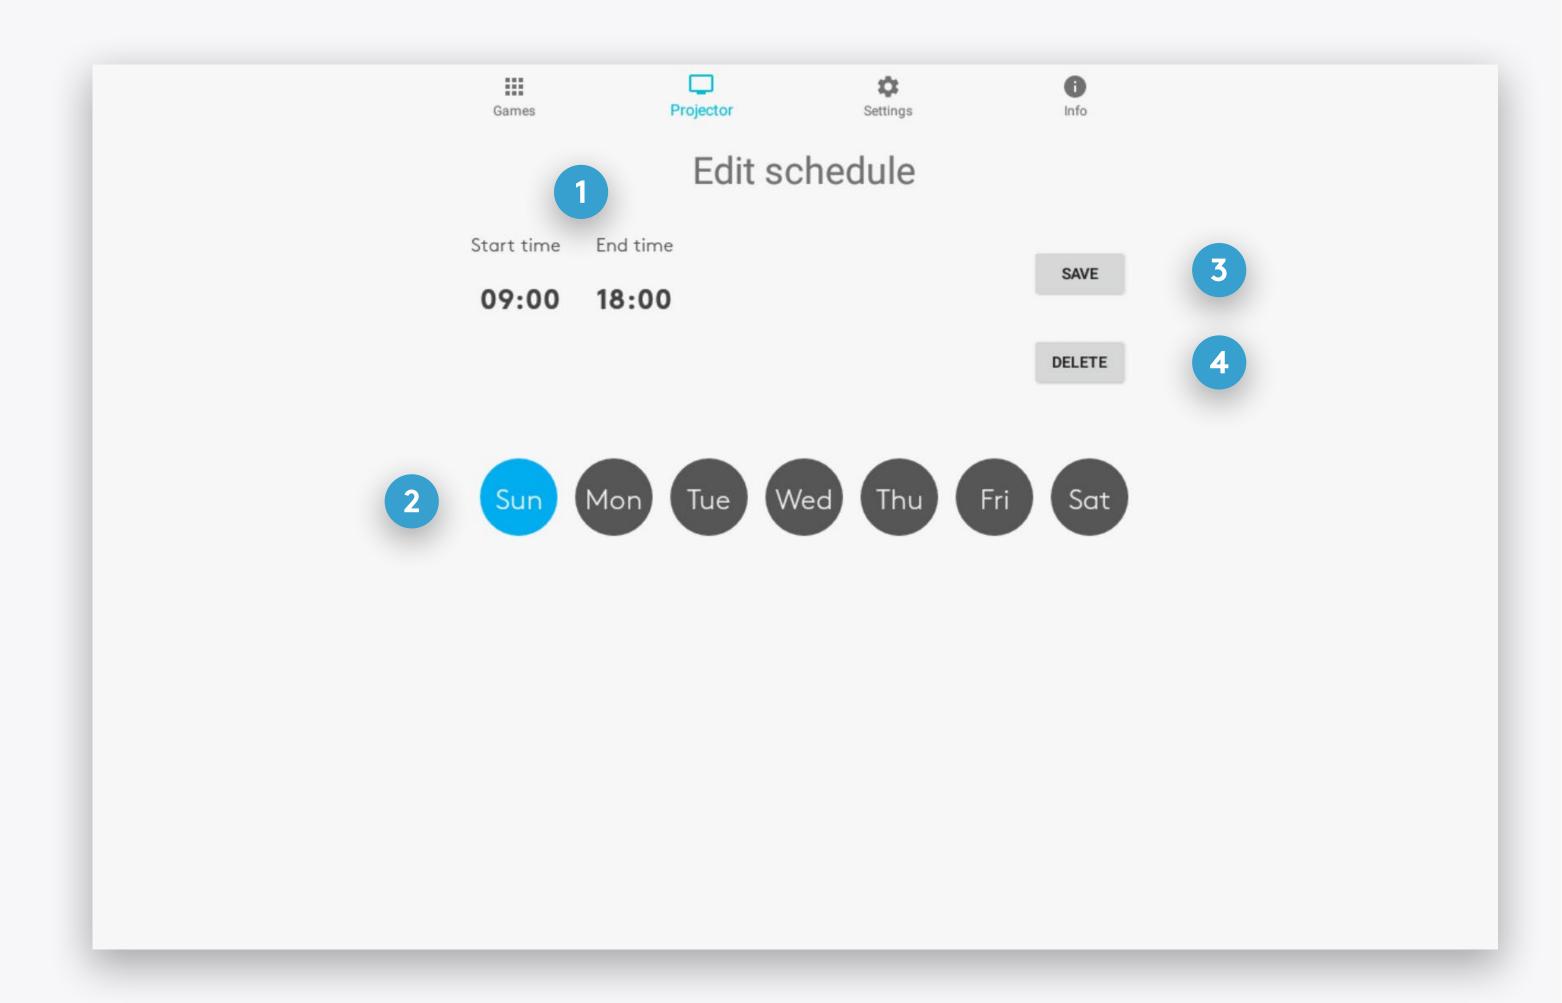

SETTINGS

View and control your BEAM's settings.





CONNECT TO WIFI

View all available WIFI netwroks and select one to connect to.

Note

An Ethernet cable connection is recommended for internet access. No configuration is required - just plug it into the network port on Beam.

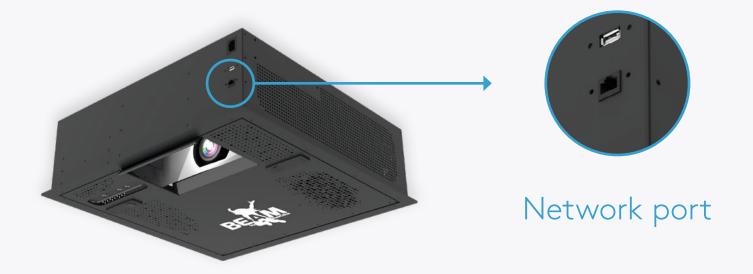

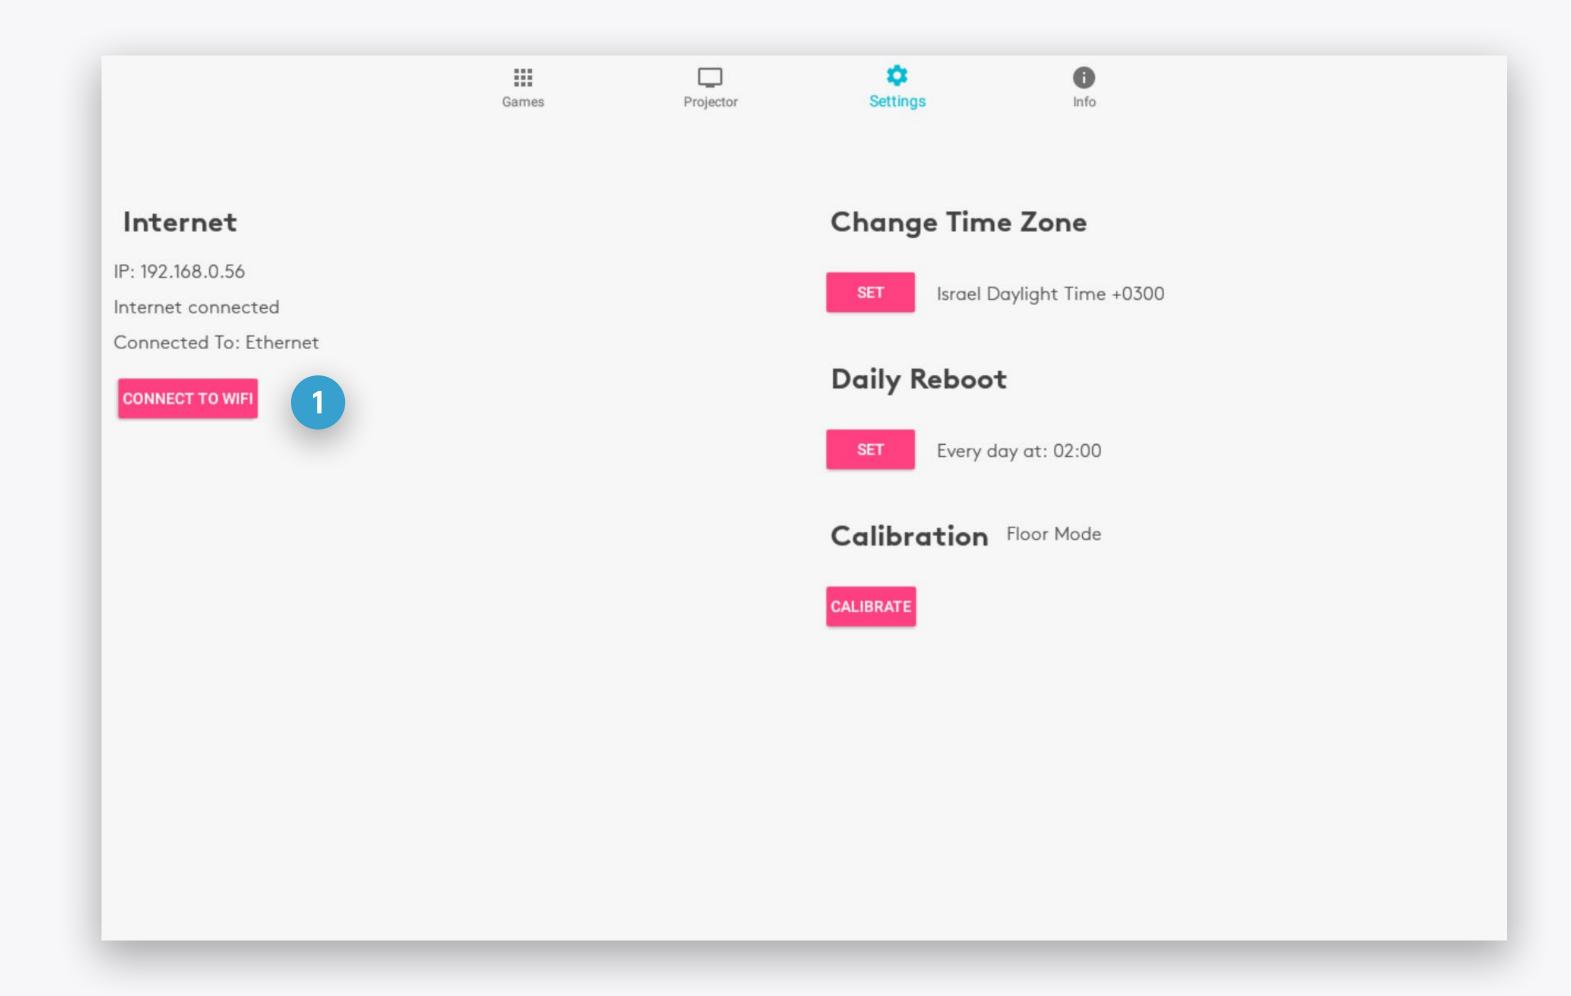

SETTINGS

View and control your BEAM's settings.


- CHANGE TIME ZONE
 Select your device's time zone.
- DAILY REBOOT

 Set when your device will reboot each day. This will not be affected by any enabled schedules or Night Savings.
- CALIBRATION

 Calibrate the motion tracking to the projection.

Note

Calibration is required after **flipping** or **rotating** the projection (through the projection button in the Projector section), or if your BEAM doesn't respond to your movements correctly.

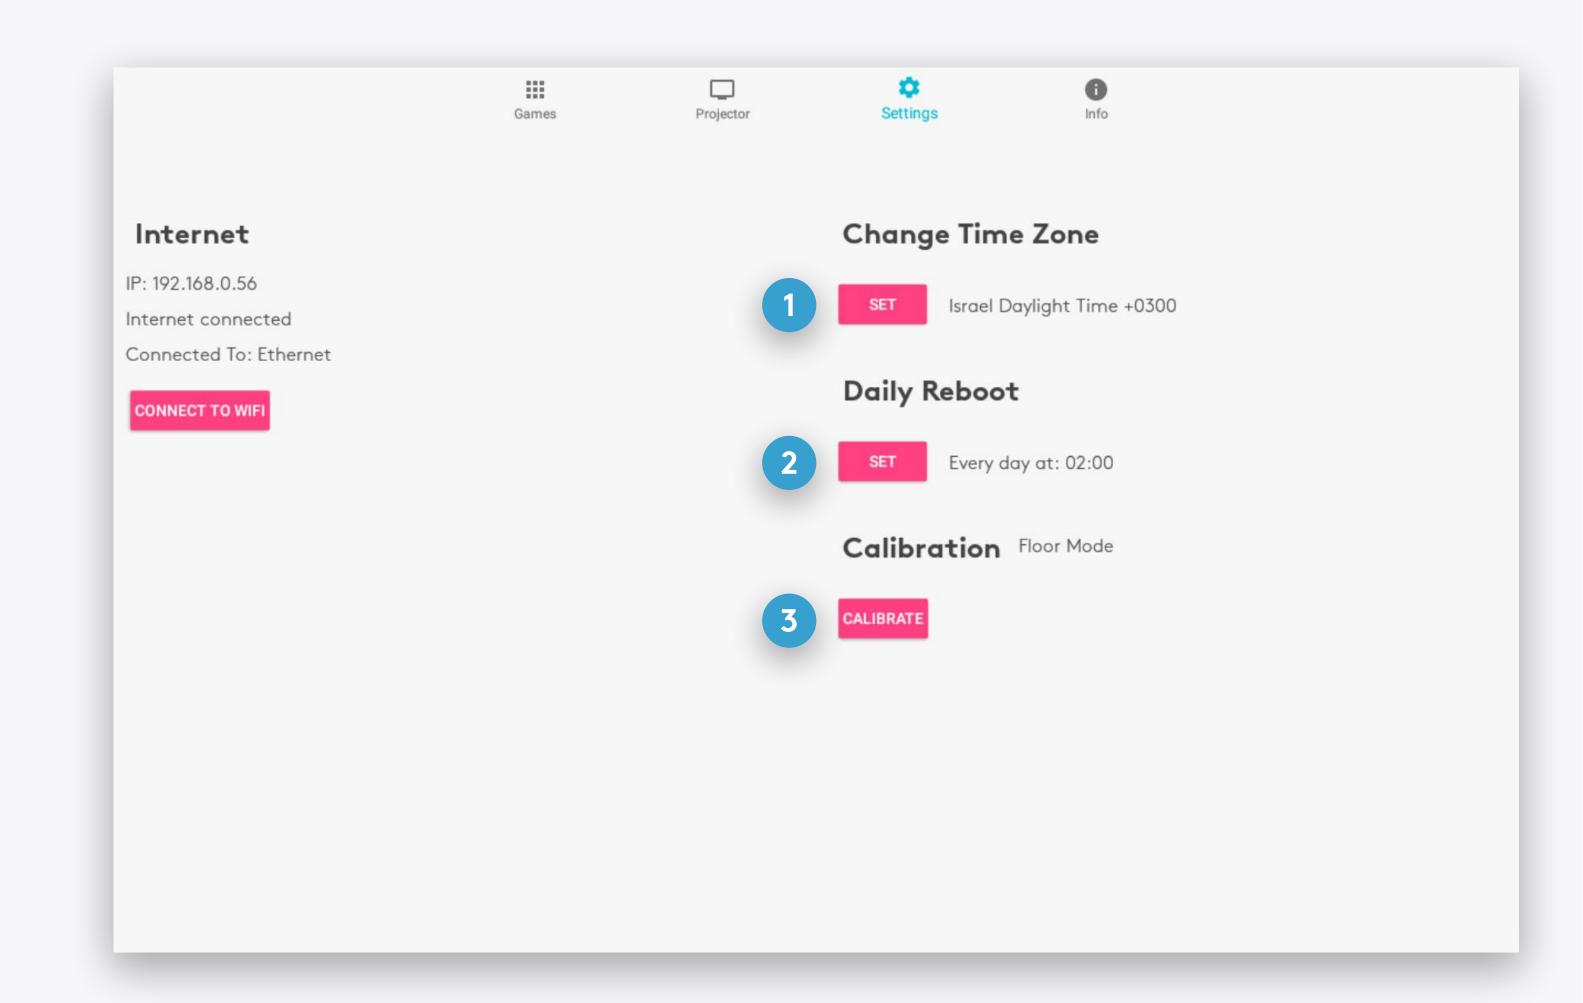

INFO

View the device, components and software information relevant when contacting support.

Games







<u>General</u>

Unit S/N: QA5

Tinker S/N: 190550372201072

TV ID: 1576783101

License type: Unlimited
Expiration date: 2999-12-31

Maintenance expiration date: 2016-12-02

Maintenance program: None

Current Date: Mon Jun 15 2020 11:50:39 Israel Daylight Time +0300

SW components

Admin version: 3.1.6.28 Engine version: none

Last SF sync: 2020-06-15 08:48:51

Content

Bundle: Android Beam Floor

Type: Floor

Branding: Beam 1.0.0

HW components

Camera model: Primesense

Screen: 1280x800: 160

Camera S/N: QA-5

PC model: Dell Optiplex 3020M

PC service tag: QA-5

Projector model: BenQ MX620ST

Projector S/N: QA-5 Lamp Usage: none

Lamp daily average usage: none

ENJOY YOUR BEAM!

For any issues or questions, please contact us

Email: support.team@eyeclick.com

Website: https://support.joinbeam.com/open-support-ticket/

